


**Industrial Electric Condensate  
 Pump Package  
 (Low NPSH)  
 Model Series ECPL-S**

The Model Series ECPL-S, Electric Condensate Pump Package is a condensate pumping unit manufactured as a ready-to-install system featuring a Stainless Steel Condensate Receiver and Low NPSH Regenerative Turbine Pump. Sized to meet specific system needs, the ECPL-S Series features non-cavitating pumps, allowing efficient pumping even under adverse inlet conditions. Utilizing the efficient design of Inducer-type Regenerative Turbine Pump, the ECPL-S Series is capable of operating at 2 ft NPSHA. The ECPL-S Series includes a pump suction isolation valve for the pump. A Stainless Steel Condensate Receiver is utilized to prolong the life of systems subject to corrosive condensate. A NEMA 12, UL-Listed Industrial Control Panel with single-point power connection is furnished pre-wired to all electrical sources. The complete package is UL-Listed.



**CONDITIONS OF OPERATION**

Max. Allowable Pressure / Temperature:	230 psig / 240 °F
Discharge rate per pump:	2 to 150 gpm - nominal
Motor size per pump:	1/2 to 50 Hp, 3 ph., 60 Hz

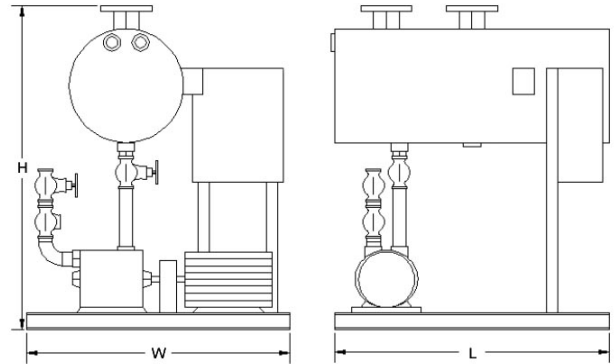

**Legend:**

- A. Condensate Inlet
- B. Vent
- C. Condensate Discharge
- D. Auxiliary Connection A
- E. Auxiliary Connection B
- F. Receiver Tank
- G. Drain

**STANDARD CONSTRUCTION**

- Fabricated Structural Channel Frame
- Stainless Steel Condensate Receiver
- Suction Isolation Valves
- Pump Discharge Flow Throttling Valve & Check Valve
- Low NPSH Regenerative Turbine Pump
- UL-Listed Industrial Control Panel
- Hydrostatically Tested
- High Temperature Enamel Coating on base

**PACKAGE OPTIONS**

- Additional / Oversized Condensate Inlet connection(s)
- Gauge Glass on Receiver
- Oversized Condensate Receiver
- Oversized Atmospheric Vent(s)
- Pump Discharge Pressure Gauges
- Overflow Pipe to 6" height above base
- Forged Steel Gate Valves
- Pump Run-time Meter
- Low-profile design for height restricted applications
- All Welded piping
- Fabricated Square Tubing Frame

Regardless of system size, temperature, pressure, fluid medium, or available floor space, **EnviroSep** can service all specialized needs.

**Model ECPL-S**  
**Packaged Pumping System Order Form**

Form 00-ECPL-S

**Specify the following parameters:**

- I. System Condensate Load = \_\_\_\_\_ lb/hr
- II. System Discharge  
Pressure Required = \_\_\_\_\_ psig
- III. Condensate Return Temperature = \_\_\_\_\_ °F

**SYSTEM OPTIONS**

Additional / Oversized Condensate Inlet  
Connections

Oversized Condensate Receiver

Oversized Atmospheric Vent

Pump Construction

Bronze fitted

All Iron

All Bronze

316 SS

Pump Discharge Pressure Gauge

Pump Suction Strainer

Remote start connection

Receiver Drain Valve

Float Switch

Gauge Glass on Receiver

Receiver Thermometer

High Level Alarm

Low Level Alarm

Panel-mounted Differential Pressure Gauge

Pump Run-time Hour Meter

Outdoor-use Rating

Condensate Inlet Isolation Valve

Regardless of system size, temperature, pressure,  
fluid medium, or space requirements, **EnviroSep** can  
provide solutions to all specialized needs.

**EnviroSep** • Fluid & Heat Recovery Systems

A Division of TMT, Inc.

PO Box 857 • Georgetown, SC 29442

Phone (843) 546-7400 / Fax (843) 546-7407

WWW.ENVIROSEP.COM

# Typical Specifications for ECPL-S

Furnish and install one **EnviroSep** Model ECPL- [A] - [B] - [C] - [D] Electric Condensate Pump Package with the system capacity to pump \_\_\_\_\_ lb/hr at a discharge pressure of \_\_\_\_\_ psig from the pump(s).

## **KEY:**

[A] = Model # (Nominal Flow from each pump- GPM)

[B] = # of pumps (1 = S, 2 = D, 3 = T, 4 = Q)

[C] = Parallel (P) or Stand-by (S) pump designation

[D] = Mechanical (M) or Electric (E) alternation for multiple pumps

**GENERAL** - This package shall be factory assembled with pump(s), condensate receiver, pump suction isolation valves, fabricated steel frame, mechanical alternator (where applicable) interconnection piping (welded per ASME Section IX certified welders), (optional) UL-listed Industrial Control Panel factory wired for single-point field connection per NEC, and the complete package shall be UL-Listed as a Packaged Pumping System.

**PUMPS**-Pump(s) shall be low NPSH inducer style regenerative turbine with a centrifugal Francis vane design impeller and a multi-vane diffuser for balancing radial loads with a capacity of \_\_\_\_\_ GPM @ \_\_\_\_\_ psig discharge head. The maximum speed of the pump shall not exceed 1750 RPM. Pump shall be of the vertically split case design with removable bearing housings and shall be furnished with mechanical seals. The suction connection shall be in the top vertical position and the discharge connection shall be in the top horizontal position. The impeller(s) shall be located on a stainless steel shaft between sealed grease lubricated ball bearings. The pump shall be mounted on a rigid, single base plate and be flexible with guard to the motor. Seal shall be rated for continuous duty at 240°F, motor shall be open drip proof, NEMA MG-1 with 1.15 service factor

**CONDENSATE RECEIVER** – Condensate Receiver shall be constructed of polished, 304L Stainless Steel and shall be GTAW welded per ASME Section IX certified welders. The receiver shall have the capacity of \_\_\_\_\_ gallons and shall be of the horizontal-mounted design. The mounting height of the receiver shall be of adequate height to permit a minimum of 2 ft. NPSH available to the system pumps when the condensate temperature is 212°F. The receiver shall be supported by rigid structural steel supports to adequately support the receiver when completely full of water. Connections shall be provided for Atmospheric Vent, Condensate Inlet, Pump Suction Connections, Receiver Drain connection, two (2) auxiliary connections, and connection for internally-mounted mechanical alternator.

**MECHANICAL FLOAT SWITCH** - System shall include, on the receiver, a combination float switch, mechanical float switch which shall be horizontally mounted in the receiver. The switch shall be NEMA I, Square D Series 9038, (with) (without) auxiliary standby float switch. The alternator shall

automatically start the lead pump of the system and shall automatically start up the pump as the system demand requires.

**CONTROL PANEL** - System shall include one (1) UL - Listed, NEMA 12, Industrial Control Panel with single-point power connection, pre-wired to all electrical components. Panel shall have thru-the-door fused disconnect; magnetic circuit breaker supplementary motor protector with fast-closing contacts, non-reversing 3-pole contactor, and variable setting, bi-metallic overload relay for each motor; 30 mm Foundry-duty switches; 30 mm Corrosion Resistant pilot lights; control transformer; Automatic Alternator (if required). Operation of each pump shall be Hand-Off-Auto with external connection to terminal blocks. When standby pump(s) are used, the standby pump(s) shall manually/automatically(customer specified) start on primary pump failure. All internal wiring shall be placed in conduit.

**MANUFACTURER** - Shall assume system liability, and performance guarantee and warranty all equipment on system for 12 months after initial start-up.

**EnviroSep** • Fluid & Heat Recovery Systems

A Division of TMT, Inc.

PO Box 857 • Georgetown, SC 29442

Phone (843) 546-7400 / Fax (843) 546-7407

WWW.ENVIROSEP.COM